


Raised Panel - Complex Doors





CRP-10RC446




7" x 6-3/4"
2-5/16" framing
U-Cove raise shown



CRP-10141




8" x 10-1/8"
3-3/8" rail width
2-5/16" stile width

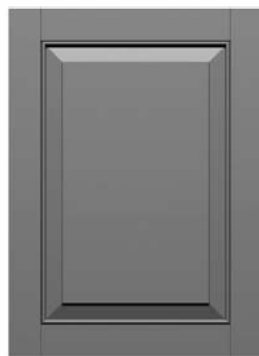

CRP-10751MT

matching drawer front available




7-1/2" x 7-1/2"
2-5/16" framing
Slant raise shown



CRP-1389MT


matching drawer front available



8-3/8" x 8-3/8"
2-3/4" framing
Slant raise shown




CRP-25MP



8-1/2" x 9-1/8"
2-5/16" framing
Slant raise shown




Half Circle



8-1/2" wide x height
Minimum door height
is 1/2 of door width
plus 2-1/2"
Max. width - 26"
2-5/16" framing
Slant raise shown



Presidential Cathedral




12" x 11-1/8"
2-3/4" framing
Presidential raise shown



Presidential Square

matching drawer front available



8-3/8" x 8-3/8"
2-3/4" framing
Presidential raise
shown


Size listed under each door represents minimum size for door. Door must exceed minimum listed by at least 3" in either width or height. Panel raise selection has an impact on actual minimum, so minimums shown are guidelines only.

Offering & Availability


All our doors are available in a wide variety of specifications to satisfy your custom needs. The information below indicates any exceptions or limitations pertaining to the designs shown on the previous page(s). For a detailed listing of particular option specifications, refer to the download indicated. These sections can be downloaded by clicking the appropriate yellow links to the right of the door images in each door category.

Woods		Hard Maple, Cherry, Soft Maple, Red Oak, Hickory
Edge Profiles	<i>See Edge Profiles Download</i>	All 3/4" profiles available.
Framing Beads	<i>See Framing Beads Download</i>	CRP-25MP and Half Circle - all 3/4" framing beads. CRP-10141 - ogee bead on rails, chamfered stiles standard. All other doors - no options available.
Panel Raises	<i>See Panel Raises Download</i>	CRP-10751MT, CRP-1389MT, Half Circle and Presidential Square - all 3/4" raises. Presidential Cathedral - all 3/4" raises except Louis XIII and P-602. CRP-25MP - slant and G-Cove only. CRP-10RC446 - G-Cove and U-Cove only, radius corners standard.
Options	<i>See Design Options Download</i>	CRP-10RC446, CRP-10141, CRP-10751MT, CRP-1389MT, CRP-25MP and Half Circle - all options available except Camelot rout. Presidential designs - all options available except Camelot rout and pegs.
Mullion/Glass	<i>See Design Options Download</i>	Mullions available on CRP-25MP, Half Circle and Presidential designs. Caution: Half Circle mullion placement varies according to the width of the door. Specify configuration to ensure that mullions align when using Half Circle doors with varying widths or with other mullion door designs.
Appliance panel	<i>See Design Options Download</i>	All available.

Quarter Circle Doors

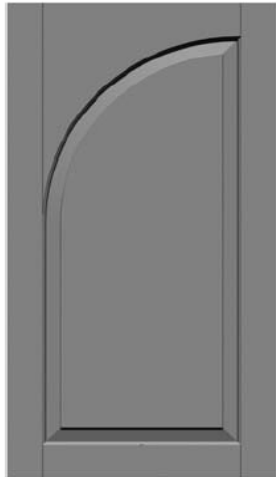


QC1000 w/Raised Panel



Minimum width - 9-1/2"
2-5/16" framing
Slant raise shown




QC2000 w/Raised Panel




Minimum width - 9-1/2"
2-5/16" framing
Slant raise shown



QC3000 w/Raised Panel




Minimum width - 9-1/2"
2-5/16" framing
Slant raise shown

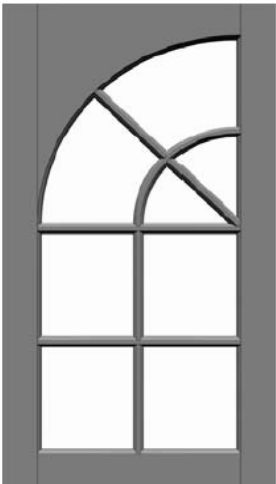


QC1000 w/Radius Mullions




Minimum width - 9-1/2"
2-5/16" framing on face
1-13/16" framing on back

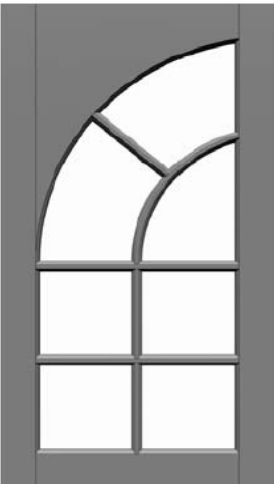


QC2000 w/Radius Mullions



Minimum width - 9-1/2"
2-5/16" framing on face
1-13/16" framing on back

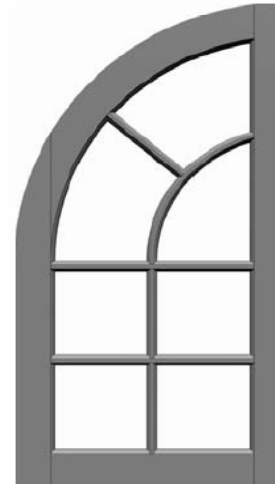

QC3000 w/Radius Mullions

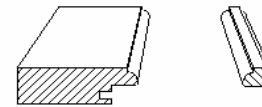

Minimum width - 9-1/2"
2-5/16" framing on face
1-13/16" framing on back

Specify QC door "with mullions" and the number of lites required. If no lites are specified, a solid panel will be given. Minimums listed are based on panel raise shown and will vary by raise; see Offering and Availability for additional options. Framing width listed is determined by measuring across the back of the framing unless otherwise noted.

Size listed under each door represents minimum size for door. Door must exceed minimum listed by at least 3" in either width or height. Panel raise selection has an impact on actual minimum, so minimums shown are guidelines only.

Offering & Availability

All our doors are available in a wide variety of specifications to satisfy your custom needs. The information below indicates any exceptions or limitations pertaining to the designs shown on the previous page(s). For a detailed listing of particular option specifications, refer to the download indicated. These sections can be downloaded by clicking the appropriate yellow links to the right of the door images in each door category.

Woods		Hard Maple, Cherry, Soft Maple, Red Oak, Hickory.
Edge Profiles	<i>See Edge Profiles Download</i>	All 3/4" profiles available on QC-1000 and QC-2000. LC Inset, L-297 and L-304 - not available on QC-3000.
Framing Beads	<i>See Framing Beads Download</i>	Raised panel designs - all available. Mullion designs - regular, square and ogee framing beads only.
Panel Raises	<i>See Panel Raises Download</i>	Raised panel designs - all 3/4" raises available. Minimum door height is the width plus 2-1/2".
Options	<i>See Design Options Download</i>	All designs available with pegs, radius corners, concealed hinge boring, face-routed hand pulls, back-routed hand pulls, distressing and wear sanding.
Mullion/Glass	<i>See Design Options Download</i>	The visual appeal of any Quarter Circle mullion door is greatly affected by the number of lites. Consult the charts on the following pages when ordering QC series doors to determine the ideal number of mullion lites for a given door size. Doors shown are for illustrative purposes only. Note: mullion lite charges must be added to the cost of the door. Minimum door height is the width plus 2-1/2".
Appliance panel	<i>See Design Options Download</i>	All raised panel designs, QC1000 and QC2000 - all available. QC3000 - apply over plywood only.

Quarter Circle 1000 Radius Mullion Recommendations

Use this chart to determine the ideal number of mullion lites for a given Quarter Circle 1000 door size or to determine availability for a given door size.

Door/Mullion Lite Availability and Recommendations																	
Height	Width																
	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
12																	
13																	
14																	
15																	
16																	
17																	
18																	
19																	
20																	
21																	
22																	
23																	
24																	
25																	
26																	
27																	
28																	
29																	
30																	
31																	
32																	
33																	
34																	
35																	
36																	
37																	
38																	
39																	
40																	
41																	
42																	
43																	
44																	
45																	
46																	
47																	
48																	

Sizes exceeding 48" in height must specify number of lites.

Quarter Circle 2000 and 3000 Radius Mullion Recommendations

Use this chart to determine the ideal number of mullion lites for a given Quarter Circle 2000 and 3000 door size or to determine availability for a given door size.

Door/Mullion Lite Availability and Recommendations																	
Height	Width																
	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
12																	
13																	
14																	
15																	
16																	
17																	
18																	
19																	
20																	
21																	
22																	
23																	
24																	
25																	
26																	
27																	
28																	
29																	
30																	
31																	
32																	
33																	
34																	
35																	
36																	
37																	
38																	
39																	
40																	
41																	
42																	
43																	
44																	
45																	
46																	
47																	
48																	

Sizes exceeding 48" in height must specify number of lites.